DISTRICT	COUNTY	ROUTE	SECTION	SHEET
6-0	MONTGOMERY	0202	65S	53 OF 157
WHITPAIN, UPPER GWYNEDD & LOWER GWYNEDD TOWNSHIPS				

REVISION NUMBER	REVISIONS	DATE	BY

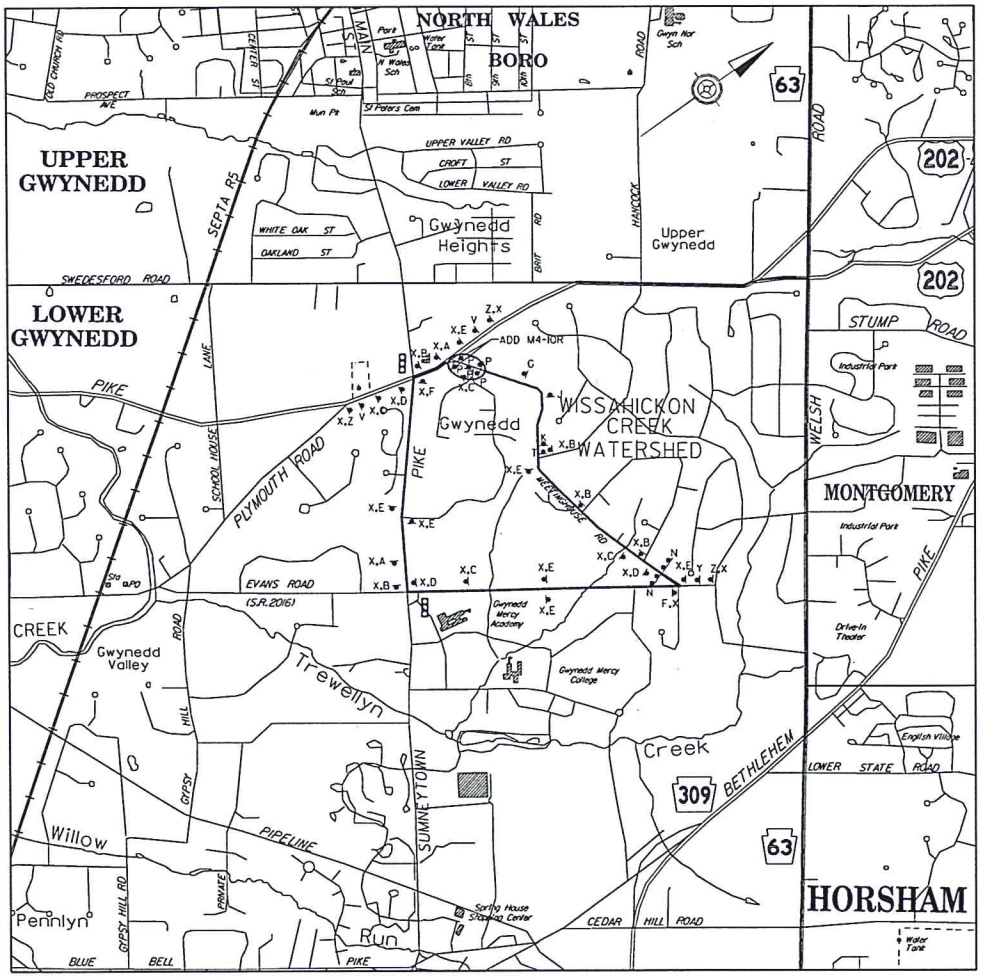

LEGEND

- WORK AREA
- DETOUR
- STATE ROUTE
- TOWNSHIP ROAD
- TOWNSHIP BOUNDARY
- SIGN
- EXISTING SIGNALIZED INTERSECTION
- TYPE III BARRICADE

1000' 0 1000' 2000'

SCALE IN FEET

SIGN LEGEND

A - DETOUR — M4-9SL 30" X 24"

B - DETOUR — M4-9L 30" X 24"

C - DETOUR — M4-9SR 30" X 24"

D - DETOUR — M4-9R 30" X 24"

E - DETOUR — M4-9S 30" X 24"

F - END DETOUR — M4-8A 24" X 18"

G - ROAD CLOSED 500FT — TYPE B LIGHT W20-3 W30-1-1 36" X 36"

J - ROAD CLOSED 1000FT — TYPE B LIGHT W20-3 W30-1-2 36" X 36"

K - ROAD CLOSED 1500FT — TYPE B LIGHT W20-3 W30-1-3 36" X 36"

L - ROAD CLOSED 1/2 MILE — TYPE B LIGHT W20-3 W30-1-4 36" X 36"

M - ROAD CLOSED 1 MILE — TYPE B LIGHT W20-3 W30-1-5 36" X 36"

N - ROAD CLOSED 1 MILE AHEAD LOCAL TRAFFIC ONLY / DETOUR — TYPE B LIGHT R11-3A 60"x30"; M4-10L 48"x18"; TYPE III BARRICADE

P - ROAD CLOSED — TYPE B LIGHT R11-2 48"x30"; TYPE III BARRICADE

NOTE:
PROVIDE SUFFICIENT NUMBER OF TYPE III BARRICADES TO COMPLETELY CLOSE ROADWAY.

O - DETOUR 1000FT — W20-2 W30-1-2 36" X 36"

R - DETOUR 1500FT — TYPE B LIGHT W20-2 W30-1-3 36" X 36"

S - DETOUR 1/2 MILE — TYPE B LIGHT W20-2 W30-1-4 36" X 36"

T - NO OUTLET — W14-2 36" X 36"

V - MEETINGHOUSE RD CLOSED BETWEEN 202 AND EVANS RD / FOLLOW DETOUR — 5'-6" x 6'-0" — 2'-0" — 6" H 2 1/2", 6" H 4", 3 1/2", 18", 3 1/2", 6" H 4", 4", 6" H 2 1/2" — TYPE B SIGN - 2 POSTS

X - MEETINGHOUSE ROAD — 2'-6" x 4'-6" — 4" H 3 1/2", 4" H 3", 4" H 3 1/2" — TYPE B SIGN - 1 POST

Y - MEETINGHOUSE RD CLOSED AT 202 / FOLLOW DETOUR — 5'-6" x 4'-6" — 2'-0" — 6" H 3", 6" H 4", 4", 18", 6" H 4", 6" H 3" — TYPE B SIGN - 2 POSTS

Z - DETOUR AHEAD — TYPE B LIGHT W20-2 W30-1-6 36" X 36"

NOTES

1. ALL DISTANCES MAY BE ADJUSTED SLIGHTLY TO FIT FIELD CONDITIONS.
2. ALL W20-2 AND W20-3 SIGNS SHALL BE A MINIMUM SIZE OF 36" X 36". ALL M4-9L, M4-9R, M4-9SL, M4-9SR, AND M4-9S SIGNS SHALL BE A MINIMUM SIZE OF 30" X 24". ALL M4-10L AND M4-10R SIGNS SHALL BE OF STANDARD SIZE 48" X 18".
3. DURING HOURS OF DARKNESS, ALL SIGNS SHALL BE REFLECTORIZED OR ILLUMINATED.
4. EXISTING TRAFFIC CONTROL DEVICES SHALL BE MODIFIED AS NEEDED FOR THE DURATION OF THE DETOUR.
5. UNLESS OTHERWISE SPECIFIED, ALL TRAFFIC CONTROL DEVICES FOR THE DETOUR SHALL BE FURNISHED, ERECTED, MODIFIED, MAINTAINED, AND SUBSEQUENTLY REMOVED BY THE CONTRACTOR FOR CONTRACT OPERATIONS OR BY THE PERMITTEE FOR PERMIT OPERATIONS.
7. ONLY ONE LEG OF ONE INTERSECTION CAN BE CLOSED AT ANY TIME. SIMULTANEOUS CLOSURE OF ANY PORTION OF MULTIPLE INTERSECTIONS WITHIN THE PROJECT LIMITS SHALL NOT OCCUR.
8. SEE TRAFFIC CONTROL PLAN SHEET 76.

MEETINGHOUSE ROAD DETOUR
STAGE 1, PHASE 2 - TRAFFIC CONTROL PLAN

PREPARED BY:
wsp
4 PENN CENTER
1600 JFK BLVD., SUITE 510
PHILADELPHIA, PENNSYLVANIA 19103
COMMONWEALTH OF PENNSYLVANIA REGISTERED PROFESSIONAL ENGINEER
RYAN WILLIAM BINDER